Dane aktualne na dzień: 12-11-2026 12:54

Link do produktu: https://www.wamm.pl/datavideo-icast-10ndi-demo-p-3257.html

DataVideo iCAST 10NDI - DEMO



Cena brutto	**6 784 zł**
Cena netto	**5 515 zł**
Cena poprzednia	~~**15 135 zł**~~
Dostępność	**Zapytaj o dostępność**
Producent	**Datavideo**

Opis produktu

DataVideo iCAST 10NDI

5-Channel All-in-one Streaming Switcher

Produce Hybrid Events Using an All-in-one Switcher.
iCAST 10NDI is a new and innovative live production equipment that houses a switcher, camera controller and streaming encoder in one box. A variety of inputs can be connected to iCAST 10NDI to allow you to create an eye catching presentation with different video sources, such as PTZ and document cameras, and a laptop for your presentation slides.
Using the built-in streaming encoder and recorder. You can easily live stream to multiple platforms and record your show to an SD card. Six video channels can be ISO recorded at the same time in order to provide you with more program materials for post production.
iCAST 10NDI is definitely a highly efficient and easy-to-use solution for video streaming and recording.

Multiple video input interfaces.
iCAST 10NDI has five video inputs with one SDI/HDMI selectable port, three HDMI only ports and one USB 3.0 port. iCAST 10NDI accepts videos from various professional cameras, laptops and document cameras.
You can also receive IP videos via an RJ-45 port. IP videos are streamed using RTMP(S) or SRT protocol. With a variety of video interfaces, you no longer need to worry about compatibility of different video devices.

Dual Multiview Modes.
iCAST 10NDI provides an intuitive preview of your output sources. You can view them either horizontally or vertically (a new technology for viewing videos on mobile devices) and preview these mode changes on a Multiview screen.

Decode up to 3 NDI channels.
One Ethernet Cable with NDI® | HX Technology
There is no need for multiple cables and complicated setup. Single-wire concept helps you to decode video and audio over only one Ethernet cable for live video switching.
NDI® is a registered trademark of Newtek, Inc.

Vertical streaming appropriate for video playback on social media.
Of all videos streamed, up to 50% of the videos are viewed on mobile devices and 94% of the mobile users hold the phone vertically to view the video. iCAST 10NDI provides vertical streaming which can be generated with only a few basic settings.

Supporting SRT protocol so that iCAST 10NDI works well even when you have low bandwidth.
Video latency often results when there is insufficient network bandwidth. iCAST-10 supports SRT protocol which mitigates packet loss when the network becomes unstable. Sometimes RTMP may give you stuttering viewing experience but SRT will solve your problem.

Recording: Easy-to-read LED indicator.
A protruding frame like LED indicator allows you to easily see its color. A red indicator means that the video is being recorded and a green indicator appears when the record function enters standby mode.
The 2" LCD screen on iCAST 10NDI allows you to view the record status of all video channels.

ISO recording of five video inputs and one main program output.
ISO recording refers to the ability to create isolated recordings of your five camera inputs and one PGM output for video backup and adding visual effects during post production. ISO recording allows you to save your data locally or on a file server.



H.264 Encoding to back up HD videos.
A built-in professional recorder records using H.264 video encoding with configurable resolution, frame rate, video bitrate, etc.

Recording Resolution
Supports up to Full HD 1080p50/60 broadcast record quality with a low file size so it is often used for long time recording. Even with a high data compression ratio, fine details of the image can still be retained as well as high recoverable color information.


A Variety of Audio Input and Output Ports.
XLR and stereo RCA ports for external analog audio and a 3.5 mm headphone jack for audio monitoring.

Audio Delay.
iCAST 10NDI is capable of independently delaying each audio channel by adjusting the delay time in order to eliminate the audio and video out of sync error.

Character Generation.
iCAST 10NDI allows you to add graphic elements such as logos, titles, text, and images to any input video channels or the program output. You can add course chapters text or workflow diagram images to your program.

Custom real-time captions and subtitles for your programs such as news broadcast.
Transcribe audio by entering subtitles line by line using News CG then play subtitles in real time by simply tapping the space bar on the keyboard.



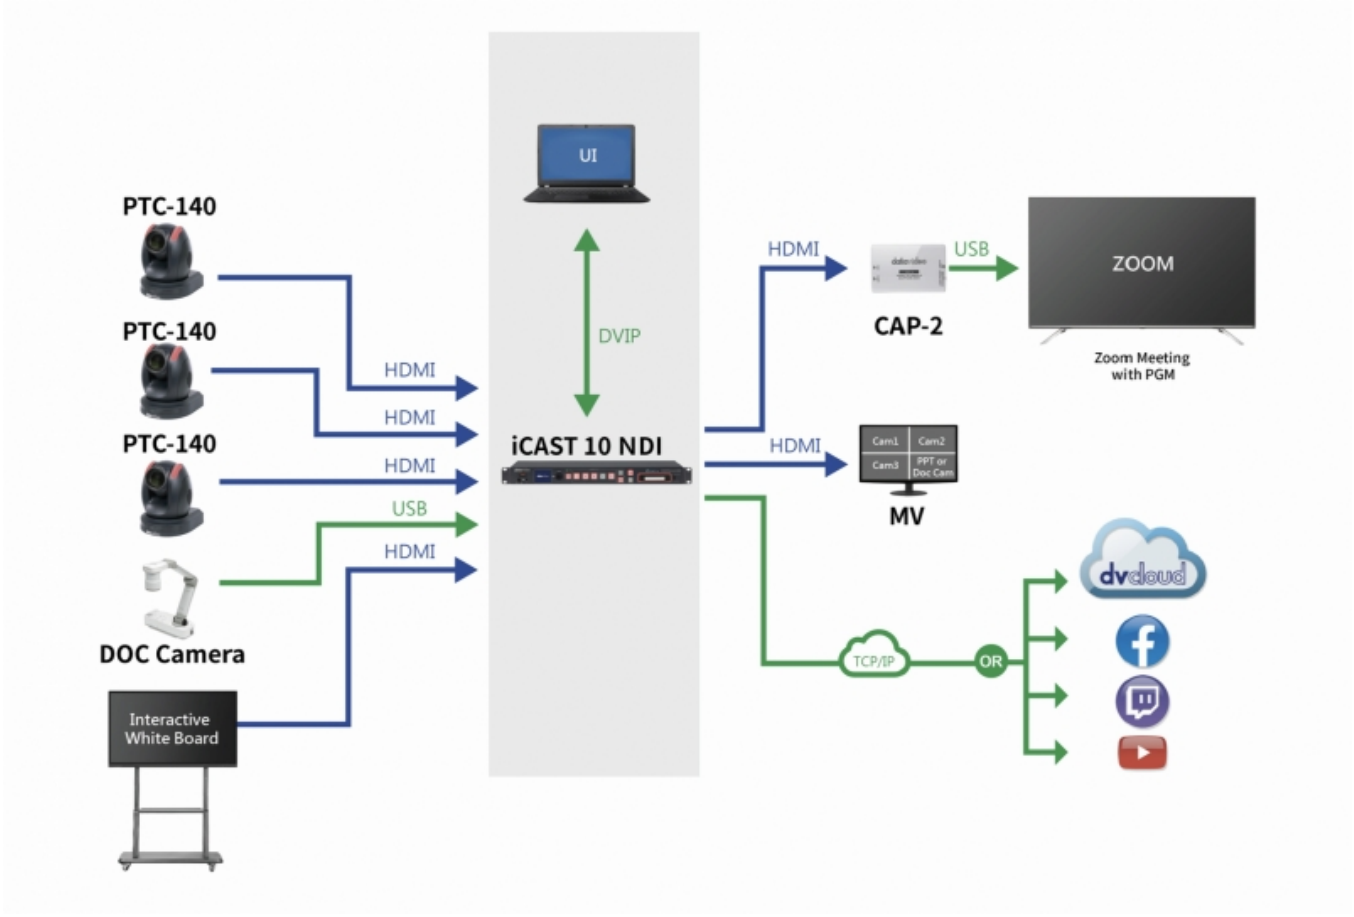

Rozszerzenie gwarancji

Produkty **DataVideo** objęte są **12 miesięczna gwarancją**, można bezpłatnie rozszerzyć gwarancję do **60 miesięcy.**
W tym celu wystarczy zarejestrować produkt w przeciągu **30 dni od daty zakupu** na stronie producenta.

