Dane aktualne na dzień: 12-11-2026 06:01

Link do produktu: https://www.wamm.pl/magewell-pro-capture-sdi-4k-plus-jednokanalowa-karta-przechwytujaca-4k-p-2195.html



Magewell Pro Capture SDI 4K Plus | Jednokanałowa karta przechwytująca 4K

Cena brutto	**5 100 zł**
Cena netto	**4 147 zł**
Dostępność	**Zapytaj o dostępność**
Kod producenta	**11180**
Producent	**Magewell**

Opis produktu


Magewell Pro Capture SDI 4K Plus

Jednokanałowa karta przechwytująca 4K


Magewell Pro Capture SDI 4K Plus to wysokowydajna, karta przechwytująca PCIe o niskim opóźnieniu. Ta jednokanałowa karta przechwytuje sygnał 12G-SDI w trybie pojedynczego 12G-SDI, podwójnego 6G-SDI lub czterokrotnego 3G-SDI. Obsługuje rozdzielczość wejściową do 4096×2160 pikseli.

Modele Pro Capture automatycznie wykrywają format sygnału wejściowego, zapewniając niezawodne, wysokiej jakości przechwytywanie wideo i audio dla profesjonalistów wideo, integratorów systemów oraz deweloperów OEM. Ponadto cechują się przetwarzaniem wideo opartym na FPGA Magewell, które nie obciąża procesora, zapewniając wysokiej jakości konwersję w górę/w dół oraz regulacje obrazu bez zużywania cennej mocy obliczeniowej systemu hosta.


Urządzenia Pro Capture obsługują systemy operacyjne Windows, Linux i macOS – w tym architektury x86, x64 oraz ARM – i oferują szeroką kompatybilność z popularnym oprogramowaniem do streamingu, produkcji na żywo, konferencji internetowych, nagrywania wykładów, współpracy oraz obrazowania medycznego. Magewell MWCapture SDK zapewnia zarówno ogólne interfejsy, jak i niestandardowe API na wszystkich platformach systemowych, pomagając deweloperom w pełni wykorzystać możliwości sprzętu Magewell i osiągnąć niższe opóźnienia, wielostrumieniowe przechwytywanie oraz synchronizację AV w wielokanałowym lub nawet wielokartowym przechwytywaniu.

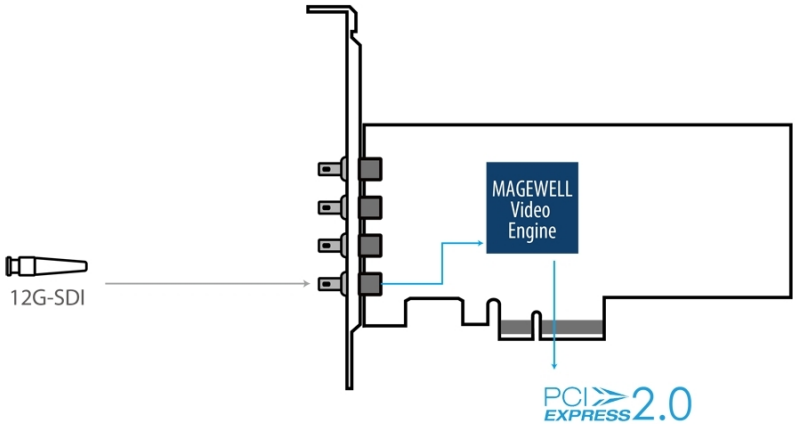

Single-link 12G-SDI

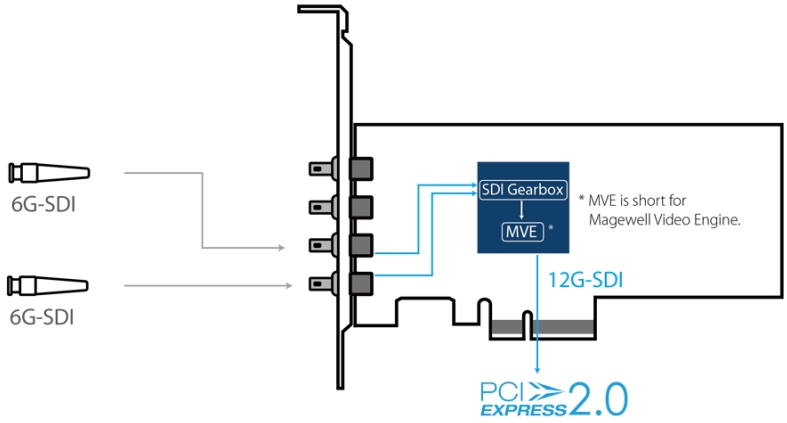

Dual-link 6G-SDI

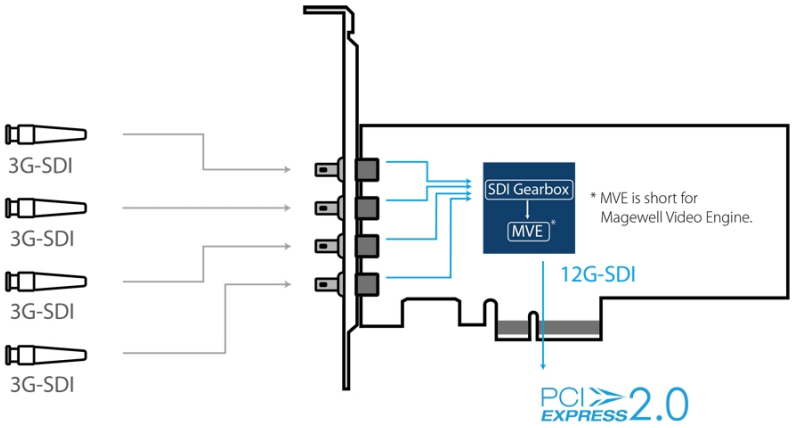

Quad-link 3G-SDI

Tech Specs

Supported OS

- Windows
  - Windows 7/8/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2016 (x86 & x64)
- Linux (support x86, x64 & ARM architecture)
  - Ubuntu 12.04/14.04/16.04/17.04/17.10 (x86 & x64)
  - CentOS 6.5/7 (x86 & x64)
  - Fedora 25/26/27 (x86 & x64)
  - Red hat 6.5 and above (x86 & x64)
  - Other Linux OS with kernel version 2.6.35 and above
- Mac
  - OS X 10.9/10.10/10.11
  - macOS 10.12/10.13

Recommended OS (tested)

	• Windows
	  ◦ Windows 7 Ultimate/8.1 Enterprise/10 Enterprise/Server 2008 R2 DataCenter/Server 2012 R2 DataCenter/Server 2016 R2 DataCenter (x86 & x64)
	• Linux
	  ◦ Ubuntu 12.04/14.04/16.04 (x86 & x64)
	  ◦ Ubuntu 17.04/17.10 (x64)
	  ◦ CentOS 6.5/7.2 (x86 & x64)
	  ◦ Fedora 25/26 (x64)
	  ◦ Red hat 6.5 (x86 & x64)
	• Mac
	  ◦ OS X 10.9.5/10.10/10.11.2/10.11.3/10.11.4
	  ◦ macOS 10.12/10.13.2/10.13.3

Supported APIs	

	• Windows
	  ◦ DirectShow
	  ◦ DirectKS
	  ◦ Wave API/DirectSound/WASAPI
	• Linux
	  ◦ V4L2
	  ◦ ALSA

Supported Software	
	• VLC • VirtualDub • OBS • xSplit • vMix • VidBlaster • Wirecast • Microsoft Media Encoder • Adobe Flash Media Encoder • Any other DirectShow/V4L2 encoding/streaming software
Input Interfaces	

	• HD-BNC x4
	  ◦ Two connectors are compatible with SD/HD/3G SDI
	  ◦ One connecter is compatible with SD/HD/3G/6G SDI
	  ◦ One connecter is compatible with SD/HD/3G/6G/12G SDI
	  ◦ Support for input of Single Link, Dual Link, Quad Link

Host Interfaces	
	• PCIe Gen2 x4
Input Features	
	• Support for input video resolutions up to 4096×2160 pixels • Auto detection of Single Link, Dual Link, Quad Link
SDI Specific Features	

- Integrated cable equalizer supporting cable lengths up to 230M for HD signals
- Support for SD/HD/3Ga/3Gb/3Ga-DL/3Gb-DS/6G/12G
- Support for 2K (2048×1080) & 4K (4096×2160) mode
- Support for RGB 4:4:4, YCbCr 4:4:4, YCbCr 4:2:2 color sampling
- Support for 10/12-bit color depth
- Support for extraction of SMPTE 352 payload identifier
- Support for up to 8 (mono) audio channels at 48KHz
- Support for extraction of audio formation information & channel status data

Video Capture Formats

- Support for capture image resolutions up to 4096×2160 pixels
- Support for capture frame rates up to 144fps. (Actual capture frame rate can be limited by PCIe bandwidth & image resolution)
- Support for 4:2:0 8-bit capture formats: NV12, I420, YV12
- Support for 4:2:2 8-bit capture formats: YUY2, YUYV, UYVY
- Support for 4:4:4 8-bit capture formats: V308, IYU2, V408, BGR24, BGR32
- Support for 4:4:4 10-bit capture formats: V410, Y410
- More capture formats are supported via Pro Capture SDK for DirectKS

Video Processing Features

- Two video processing pipelines with ~720 Mpixels/s processing bandwidth for each one
- Full 10-bit video processing
- Video cropping
- Video scaling
- Video de-interlacing
    - Weave
    - Blend top & bottom field
    - Top field only
    - Bottom field only
- Video aspect ratio conversion
    - Auto or manual selection of input aspect ratio
    - Auto or manual selection of capture aspect ratio
    - Three aspect ratio conversion modes: Ignore (Anamorphic), Cropping or Padding (Letterbox or Pillarbox)
- Video color format conversion
    - Auto or manual selection of input color format & quantization range
    - Auto or manual selection of capture color format, quantization range & saturation range
    - Support for RGB, YCbCr 601, YCbCr 709, YCbCr 2020 color formats
    - Support for Limited or Full quantization range
    - Support for Limited, Full & ‘Extended gamut’ saturation range
- Video frame rate conversion
- Video OSD composition
    - Support for PNG OSD image (up to 4096×2160)
    - Support for dynamic loading of RGBA OSD image via SDK

Multiple Cards per System

	• Support for multiple cards plugged to one system • On-board rotary switch to set card number, with 16 positions from 0 to F • System hardware device tree will display “01: Pro Capture SDI 4K+” when rotary switch is set to 1, and so on • The video and audio device names displayed in your software will include the card number (set by the rotary switch)
Multiple Capture Streams	
	• Unlimited capture streams for any one input channel • Independent cropping, aspect ratio, color format, resolution, frame rate, de-interlacing and color adjustment settings for each individual stream
Ultra Low Latency Support	
	• Latency of 64 video lines • Partial notification mode in SDK
Timestamp & A/V Synchronization	
	• Hardware based 100ns high resolution clock • Audio frames (192 audio samples) & video frames are stamped with hardware clock • Hardware clock can be synchronized across cards (via SDK)
Video Capture SG-DMA	
	• ~1600MB/s per channel DMA bandwidth in PCIe 2.x system • ~800MB/s per channel DMA bandwidth in PCIe 1.x system • Support for auto detection of Intel tiled GPU surface • Support for DirectGMA for AMD video adapter chipsets • Support for GPUDirect for Nvidia video adapter chipsets
SDK	
	• Pro Capture SDK for DirectShow for easy integration (Windows) • Pro Capture SDK for DirectKS for maximum flexibility & performance (Windows)
Windows Driver Tweaks	
	• All options can be controled by three levels of registry key: global level, product level and device level • Video, Audio, Crossbar filter names can be customized via registry keys
Firmware Upgrade	
	• Multiple cards in one system can be upgraded simultaneously • Cards can be upgraded without a system power shutdown (In most cases, even a reboot is not needed) • Safe upgrade. If power off or system break down occur when the firmware is being upgraded, it will

	automatically restore to the initial version. This function is only available for firmware version 1.21 and above.
LED Indicator	
	• Status LEDs indicate the working state of each channel: idle, input signal locked, memory failed or FPGA configuration failed.
Form Factor	
	• Low profile PCIe x4 Add-on Card • 140mm x 68.88mm (without PCI bracket)
Power Consumption	
	• Max current at 12V: TBD • Max current at 3.3V: TBD • Max power consumption: TBD
Working Environment	
	• Operating temperature: 0 to 40 deg C • Storage temperature: –20 to 70 deg C • Relative Humidity: 5% to 90% non-condensing